

HOW TO ORDER

When ordering, please order one of the basic models shown below. Also specify the Speed Range: 1, or U (see Table B), and the Shaft Size, (see Table E.) Shaft F is standard.

- 4110B2 For oil service only.
(Automatic reset)
- 4110B3 For air service only.
(Has manual reset)

If required, one or more of the following special features may be ordered:

1. Equipped with extended mounting adapter.
2. Equipped with square drive cable and special mounting adapters for Detroit Diesel Allison engines. (Give engine Model No. and RPM.)
3. BSP Parallel Port Threads (instead of NPT.) Available from U.K. factory only.
4. Shipped with right angled speed adaptor:
 - 1:1 Order P/N 11070L001
 - 1:1.5 Order P/N 11070L002
 - 1:2.0 Order P/N 11070L003
 - 1:3.0 Order P/N 11070L005

**CALL TOLL FREE
1-877-244-4883
TO PLACE AN ORDER.**

The unit may be ordered using the full description as shown above or by constructing a Model No. using the Model Code System.

MODEL CODE SYSTEM

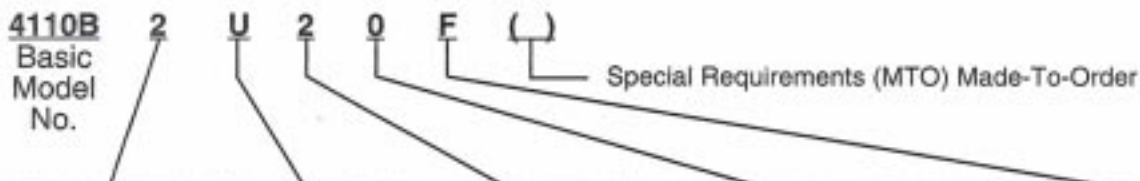


TABLE A	TABLE B	TABLE C	TABLE D	TABLE E
Type of Service Reset & Seals Code No.	Speed Range Code No.	Threads & Finish Code No.	Mounting Adapter Code No.	Shafts, Extended Mounting Adapter or Alternate Mounting Adapter Codes
2- Oil Service Automatic Reset Viton	1- 800 - 1200 RPM	2- NPT Threads Gulfproofed	0- Standard Mounting Adapter (for use with Table E, Codes E, F, & H)	E- SAE .155/.150 - Gulfproofed
3- Air Service Manual Reset Buna N	U- 1201 - 4200 RPM (Unset)	*4- BSP (PL) Threads Gulfproofed	1- Alternate Mounting Adapter (for use with Table E, Codes S & T)	F- SAE .188/.183 - Gulfproofed
				H- Extended Mounting Adapter with SAE .188/.183 - Gulfproofed
				S- "N" Type Mounting Adapter with Flexible Shaft - Gulfproofed For 3,4, 6-71 In-line Detroit Diesel
				T- "P" Type Mounting Adapter with Flexible Shaft - Gulfproofed For 6,8,12,16V71 Detroit Diesel