

HOW TO ORDER


Call Toll Free -1-877-244-4883

When ordering please specify the following:

1. AMOT Model 4475B/4075D.
2. Desired well, see Table B.
3. Any of the following special features if required.
 - a. British Standard Parallel or Tapered Port Threads (instead of NPT). Available from U.K. factory only.

These valves may be ordered by using the full description shown above or by constructing a Model No. using the Model Code System. The complete Model No. for a standard valve with aluminum body, NPT port threads, 3/4 NPT installation thread and 3-3/4 inch installed depth is 4075D101.

MODEL CODE SYSTEM

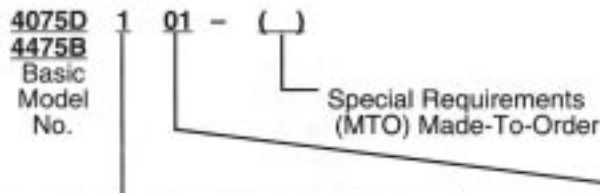

NOTE: Letters or numbers in the MTO space, other than nothing, A1 or AA, indicate the unit is built to special requirements and some of the other code numbers may not be valid. Check with the factory for full specification of such models.

TABLE A Thread & Finish			TABLE B Well					
Code No.	Thread	Finish	Code No.	Maximum Pressure** psi (kPa)	Installed Depth Inch (mm)	Thread	Material St. Steel Class	
MODEL 4075								
1	NPT	Gulfproofed Aluminum	01	5,500 (37,900)	3-3/4 (95.3)	3/4 NPT	416	
			02	5,550 (37,900)	5-3/4 (146.1)	3/4 NPT	416	
3*	BSP(PL)	Gulfproofed Aluminum	03	10,000 (68,900)	3-3/4 (95.3)	1" NPT	416	
			04	10,000 (68,900)	5-3/4 (146.1)	1" NPT	416	
			05*	3,750 (25,800)	3-3/4 (95.3)	3/4 NPT	326S36	
			06*	3,750 (25,800)	5-3/4 (146.1)	3/4 NPT	326S36	
			07*	6,000 (41,300)	3-3/4 (95.3)	1" NPT	326S36	
			08*	6,000 (41,300)	5-3/4 (146.1)	1" NPT	326S36	
			11*	3,750 (25,800)	3-7/16 (87.3)	3/4 BSP(PL)	326S36	
			12*	3,750 (25,800)	5-7/16 (138.1)	3/4 BSP(PL)	326S36	
			13*	6,000 (41,300)	3-3/4 (95.3)	1" BSP(Tr)	326S36	
			14*	6,000 (41,300)	5-3/4 (146.1)	1" BSP(Tr)	326S36	
			41	10,000 (68,900)	3-3/4* (95.3)	1/2 NPT	416	
			42	10,000 (68,900)	5-3/8* (136.5)	1/2 NPT	416	
			43	10,000 (68,900)	6* (152.4)	1/2 NPT	416	
			MODEL 4475					
0	NPT	316 S.S.	31	3,750 (25,840)	3-3/4 (95.3)	3/4 NPT	316 S.S.	
			32	3,750 (25,840)	5-3/4 (146.1)	3/4 NPT	316 S.S.	
			33	6,000 (41,340)	3-3/4 (95.3)	1" NPT	316 S.S.	
			34	6,000 (41,340)	5-3/4 (146.1)	1" NPT	316 S.S.	
			35*	3,750 (25,840)	3-7/16 (87.3)	3/4 BSP(PL)	316 S.S.	
			36*	3,750 (25,840)	5-7/16 (138.1)	3/4 BSP(PL)	316 S.S.	
			37*	3,750 (25,840)	3-3/4 (95.3)	3/4 BSP(Tr)	316 S.S.	
			38*	3,750 (25,840)	5-3/4 (146.1)	3/4 BSP(Tr)	316 S.S.	
			39*	6,000 (41,340)	3-3/4 (95.3)	1" BSP(Tr)	316 S.S.	
			40*	6,000 (41,340)	5-3/4 (146.1)	1" BSP(Tr)	316 S.S.	

Indicates special order.

* Available from U.K. factory only.

** Pressures shown are maximum allowable. To obtain working pressure, factors of safety should be applied as required by appropriate codes or regulations. In certain adverse conditions, a corrosion or erosion allowance should also be made.